

ELECTRIC ROUGH-TERRAIN SCISSOR LIFT

PULSEO
GENERATION

HS4390 E
HS5390 E



HIGH PERFORMANCE & ROUGH TERRAIN CAPABILITIES

- > Platform capacity of 1,650 lbs
- > Drive axle with manual locking rear differential increases ground traction

FULL ELECTRIC DRIVE

- > Quiet & clean operation
- > Versatile use: outdoor/ indoor
- > Smooth & proportional movements

MAINTENANCE AND SERVICE-ORIENTED

- > Activ'Screen: on-board configuration & diagnostic interface
- > Easy access to components
- > Activ'Energy Management takes care of your battery

EXTENDED DUTY CYCLES

- > Multiple charging modes including optional accelerated charge
- > Optional & removable, low fuel consumption Range Extender


HS4390 E HS5390 E

ELECTRIC ROUGH-TERRAIN SCISSOR LIFT

TECHNICAL DATA

| | HS4390 E | HS5390 E |
|--|------------------------|------------|
| Working height | 48 ft 8 in | 58 ft 6 in |
| Platform height | 42 ft 8 in | 52 ft 6 in |
| Driveable at full height up to | 42 ft 8 in | 36 ft 8 in |
| Lift capacity | 1,654 lb (4 pers.) | |
| Lift capacity - extension | 496 lb | |
| A Platform length - outside | 12 ft 11 in | |
| Platform length - extended | 16 ft 1 in | |
| B XL platform length (option) | 16 ft 2 in | |
| XL platform length - extended (option) | 24 ft 7 in | |
| Extension length | 3 ft 3 in | |
| Length - extension XL option | 4 ft 2 in | |
| C Platform width - outside | 6 ft 2 in | |
| D Height - stowed | 10 ft | 10 ft 4 in |
| Height - guardrails lowered | 7 ft 5 in | 7 ft 9 in |
| E Overall width | 7 ft 7 in | |
| F Length | 14 ft 5 in | |
| G Wheelbase | 9 ft 1 in | |
| H Ground clearance | 13 in | |
| Drive speed | 3.1 mph | |
| Gradeability | 45 % | 40 % |
| Tilt (longitudinal / lateral) | 5° / 3° | 5° / 2° |
| Turning radius - outside | 22 ft 2 in | |
| Tires | 32.7 x 11.2 in | |
| Batteries | 8 x 6 V - 435 Ah (C20) | |
| Weight | 16,577 lbs | 17,746 lb |

Certain options increase the machine weight

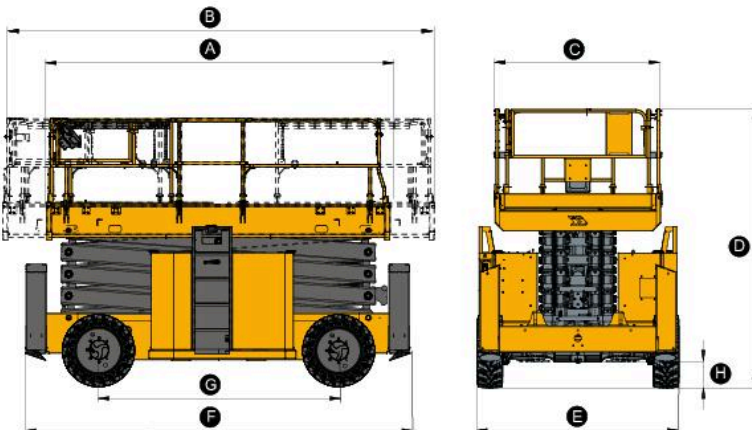

STANDARD EQUIPMENT

- > 4 wheel drive
- > Folding handrails
- > Mechanical axle with manual locking rear differential
- > Outriggers with centralized or individual controls
- > One platform extension
- > Double swing gate entries
- > Haulotte Activ'Energy Management: smart battery management system & manual centralized watering
- > AC motors
- > 48V battery pack
- > Haulotte Activ'Screen

OPTIONS AND ACCESSORIES

- > Haulotte Activ'Shield Bar
- > Double swing gate entries (Standard in North America)
- > Standard platform with dual extensions (19 ft 4 in)
- > XL platform with dual extensions (24 ft 7 in)
- > Range Extender (5.5 kW - Stage 5)
- > Accelerated charger (240V)
- > Automatic battery water-filling system
- > Cold & arctic weather kits
- > Non marking tires
- > Material handling rack
- > AC power to platform plug (110 / 230 V)
- > Scissor stack protection
- > Platform lighting
- > Work light
- > Telematics holder & pre-wiring
- > Telematics solutions

