

POWER TO PERFORM

Genie® 3,500 kg (7,715 lbs) and 4,000 kg (8,818 lbs) capacity high reach rough terrain telehandlers are available in four models with a maximum lifting height from 9.82 m (32 ft 3 in) to 17.19 m (56 ft 5 in), so you can increase productivity on jobsites ranging from new construction of multi-storey buildings to masonry. Those SX (Standard FiXed) models are a simple, reliable and cost-effective choice for every rental yard. They are perfect for tough daily jobs where high lifting capacity is required. Powerful features such as four-wheel drive and a turbocharged diesel engine provide reliable performance in the most rugged conditions.



RUGGED WORKHORSE

These Genie® telehandlers offer excellent lift capacity, easily covering all your worksite needs. When you consider their outstanding vertical and horizontal reach, you'll continue to find productive uses for your Genie® telehandlers every day.

ROOMY CONTROL

Step inside the cab and the combination of operator comfort and precision control is obvious. The comfortable cab offers excellent visibility, and the easy-to-use, multi-function mechanical joystick provides fast, precise positioning of the boom and forks.



Genie® SX telehandlers are highly reliable and have low maintenance cost to maximize worksite productivity.



FIRST ON THE JOB, LAST TO LEAVE

SX telehandlers are the perfect heavy-duty choice for loading, unloading, moving and placing loads or materials throughout any construction site. Great for preparing a worksite, these telehandlers are often the first on the job and with their exceptional cleanup capabilities, they'll be the last to leave the jobsite as well.



BUILT-IN VALUE

Top-quality parts and rugged design make Genie® models an industry favourite for long-term use and value. Interchangeable, common components plus easy no-tool access to daily inspection points make Genie® telehandlers as easy to service as they are to use.

SUPERIOR TERRAINABILITY

The SX models are very powerful and have a high towing force. It enables the machines to combine a high climbing capacity with a fast travel speed. The differential lock of the axle increases wheel traction for maximum efficiency on muddy or uneven terrain.



STANDARD FIXED MODELS

GTH™-4010 SX GTH™-3512 SX GTH™-4013 SX GTH™-4017 SX

Specifications

MODEL	GTH-3512	
MEASUREMENTS	Metric	Imperial
Lifting height (max)	12.12 m	39 ft 9 in
Lifting capacity (max)	3,500 kg	7,715 lbs
Lift capacity at maximum height	2,500 kg	5,511 lbs
Lift capacity at maximum reach	1,000 kg	2,204 lbs
Forward reach (max)	8.53 m	28 ft
Reach at maximum height	1.17 m	3 ft 10 in
A Height	2.45 m	8 ft
B Height at steering wheel	1.84 m	6 ft
C Width	2.25 m	7 ft 5 in
D Inside cab width	86 cm	2 ft 10 in
E Track	1.85 m	6 ft 1 in
F Wheelbase	2.75 m	9 ft
G Length at front wheels	4.44 m	14 ft 7 in
H Length at fork-holder plate	5.75 m	18 ft 10 in
I Ground clearance	43 cm	1 ft 5 in
L Overall width, stabilisers extended	2.93 m	9 ft 7 in
M1 Obstruction angle	37°	37°
M2 Departure angle	39°	39°

PRODUCTIVITY

Lifting/lowering speed	13 sec./ 8 sec.	13 sec./ 8 sec.
Extension/retraction	20 sec./ 24 sec.	20 sec./ 24 sec.
Inside/outside turning radius	2.42 m/4.5 m	7 ft 11 in/ 14 ft 9 in
Break-out force (with 500 L shovel SAE J 732/80)	4,500 kg	9,920 lbs
Towing capacity at dynamometer	8,200 kg	18,076 lbs
Travel speed	30 km/h	18.6 mph
Fork-holder plate rotation	145°	145°
Floating forks	Length 1200 mm Section 120x45mm	Length 3 ft 11 in Section 5 in x 1.77 in
Tyres (DIN 70361)	405/70-20" PR16 8 holes wheel disc	

POWER

Engine	Deutz Turbo Diesel 60 kW (81.5 hp)	
Tank capacities		
Fuel	92 L	20 gal
Engine oil	8 L	1.75 gal
Hydraulic oil	90 L	19.8 gal
Hydraulic output/pressure	82 L/min-280 bars	18 gal/min-4,061 psi




WEIGHT

Weight*	9,000 kg	19,840 lbs
---------	----------	------------

STANDARDS COMPLIANCE

Operating cab conforms to ISO3471 (ROPS) and ISO3449 (FOPS)
Low emission engine conforms to UE 97/68 directives.

* Weight will vary depending on options and/or country standards

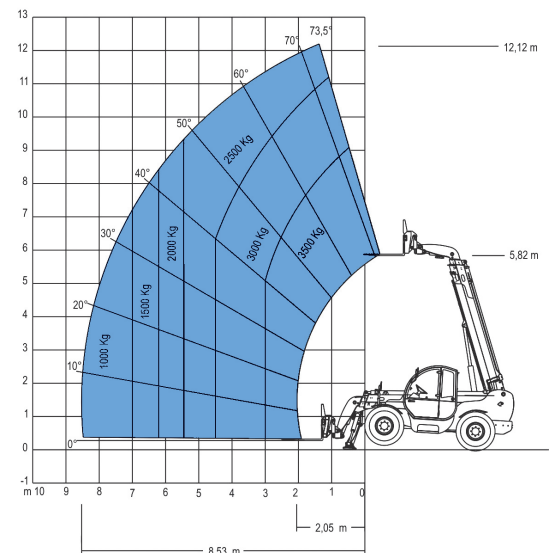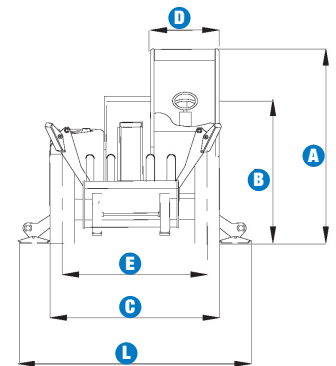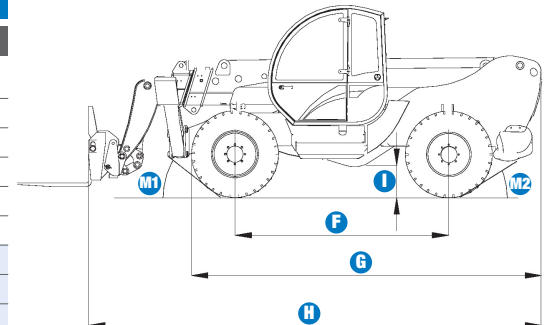

Lift capacity chart (with stabilisers)

EN1459, Annex B

Features

STANDARD FEATURES

MEASUREMENTS

- 3,500 kg (7,715 lbs) maximum lift capacity
- 12.12 m (39 ft 9 in) maximum lift height
- 8.53 m (28 ft) maximum forward reach

PRODUCTIVITY

- Four-wheel drive
- 3 steering modes:
 - front wheel steer
 - crab steer
 - coordinated steer
- Power assisted steering
- Front hydraulic stabilisers
- Two-speed mechanical gearbox
- Hydraulic proportional distributor
- Multifunction proportional joystick hydraulically piloted
- Limited slip differential on front axle
- Floating forks
- Adjustable suspended seat
- Large diameter steering wheel
- Front windscreen wipers
- Front & rear lights
- Oil immersed, multi-disc, self adjusting brakes on both axles
- Lockable fuel tank
- Longitudinal stability control system with load monitor
- Visible display with coloured LEDs
- Audible alarm
- Automatic lock-out of boom extension and lowering
- Control enable switch

POWER

- Deutz Turbo Diesel 60 kW (81.5 hp)



OPTIONS & ACCESSORIES

PRODUCTIVITY

- Air conditioning
- Hydraulic line on boom
- Attachment holder plate with hydraulic coupling
- Quick coupling for attachments
- Electric pre-arrangement on boom
- Pre-arrangement for mixing bucket
- Second hydraulic line on boom
- Special air filter
- Windshield protection grid
- Adjustable spotlight
- Wiper on cab roof

ATTACHMENT OPTIONS

- Loading shovel 800 L
- Light material loading shovel 2000 L
- Concrete bucket 500/800 L manual/hydraulic discharge
- Concrete mixing bucket 500 L with remote control
- Brick-holder basket
- Fixed hook on plate
- 4 m jib, 900 kg capacity
- 4 m jib with 900 kg capacity hydraulic winch
- Hydraulic winch 3000 kg
- Water muffler

Working At Height Limited

(Southern Office)
Amberley Court
Old Elstead Road
Milford
Surrey
GU8 5EB
Fax: 01483 417 719
Tel: 01483 415 410

Working At Height Limited

(Northern Office)
The Portergate
Ecclesall Road
Sheffield
South Yorkshire
S11 8NX

Tel: 0114 209 6206
Fax: 0114 209 6001

Suppliers of:

Powered Access Platforms
Aerial Work Platforms
Runabout Access Platforms
Scissor Lifts
Articulating Boom Access Platforms
Telescopic Boom Access Platforms
Material Lifts
Telehandlers
MEWPS Training