



OPTIMUM 1930 E

Optimum compactness

- Width of 0.76 m to operate in the most congested areas
- Compact stowed height for easy access through standard doorways

Exceptional productivity

- Driveable at full height
- Load capacity up to 270 kg
- Extended platform
- Long working cycles

Reliable and easy to maintain




Haulotte 
GROUP
More than lifting




TECHNICAL DATA

Optimum 1930 E

Working height	7.59 m
Platform height	5.76 m
Driveable at full height up to	5.76 m
Lift capacity - inside	227 kg
Lift capacity - outside	N/A
A Platform length - outside	1.73 m
B Platform length - extended	2.64 m
Extension length	0.91 m
C Platform width - outside	0.68 m
D Storage height	2.01 m
E Height - stowed	2.01 m
F Overall width	0.76 m
G Length	1.88 m
H Wheelbase	1.37 m
I Ground clearance	0.1 m
Ground clearance - Pothole guards deployed	0.025 m
Drive speed	0.4 - 2.8 mph
Gradeability	25 %
Lift / lower speed	20 s / 37 s
Turning radius - outside	1.7 m
Non-marking tires	12.5 x 4.25
Batteries	24 V - 180 Amp (C5)
Hydraulic system capacity	22.73 L
Weight	1,420 kg

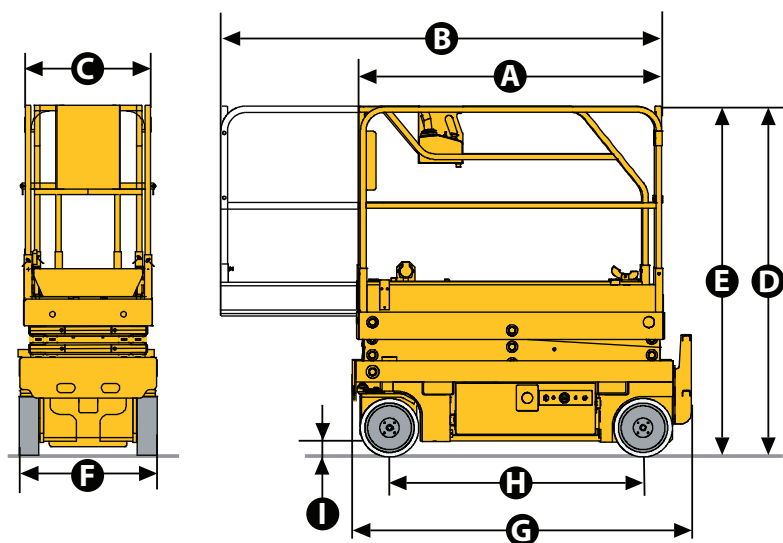

Optimum 1930 E

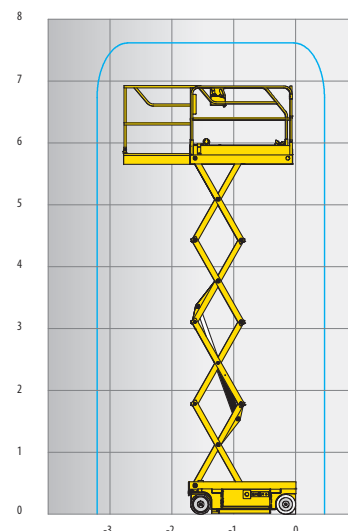

STANDARD EQUIPMENT

- Pothole guards
- Battery charge indicator
- Proportional lift and drive
- Slide out battery compartment
- Swing out component tray
- Battery charger 110V / 60Hz
- Non-marking tires
- Free wheeling device
- Tilt alarm
- Load management system in the platform
- Manual platform lowering valve
- Integrated forklift pockets
- Towing hooks
- Horn
- Hour meter

OPTIONS AND ACCESSORIES

- Flashing beacon
- Alarm package (descent and travel)
- 70 W platform work light